






F//LINE 33 OUTBOARD

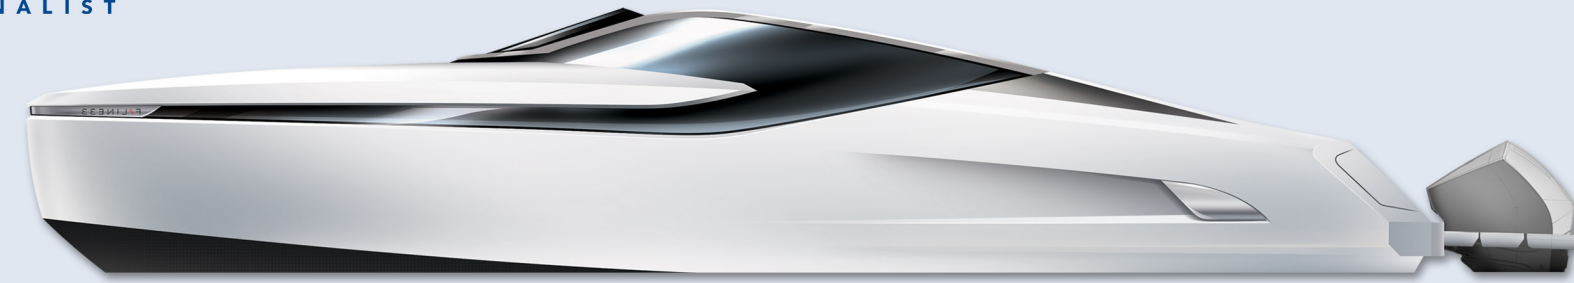


- HardTop (optional)

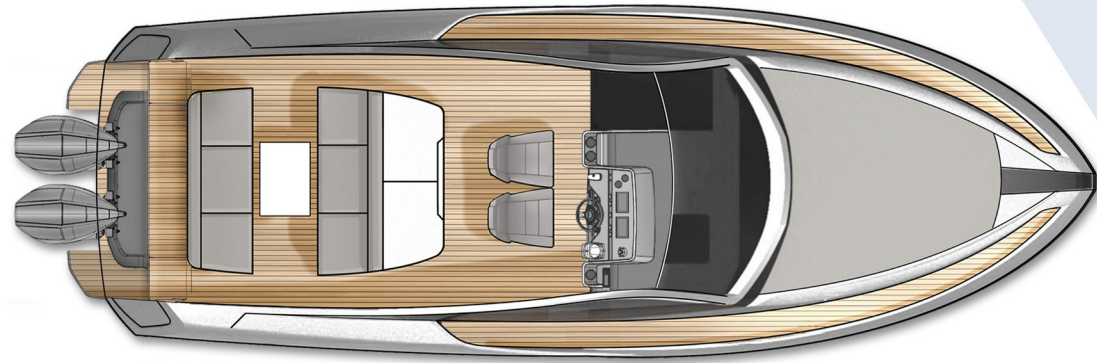


- Main Deck - Layout 1

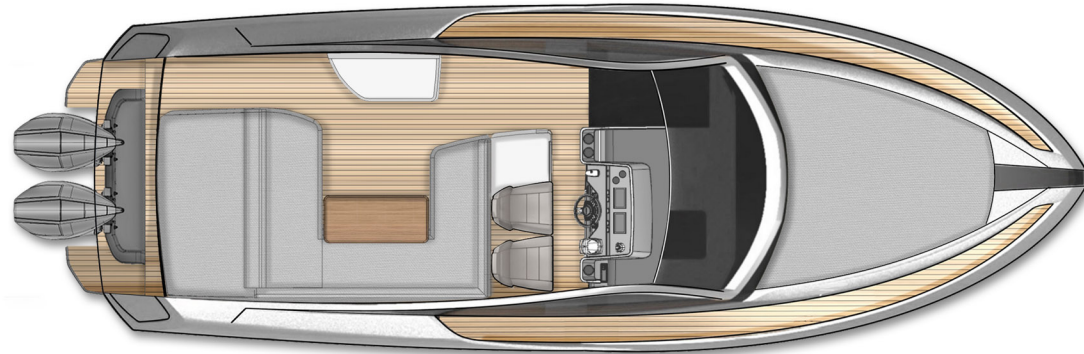

- Main Deck - Layout 2

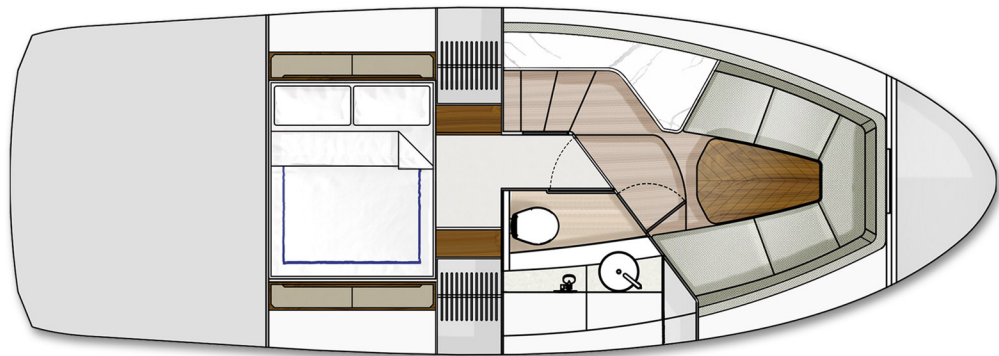

- Lower Deck

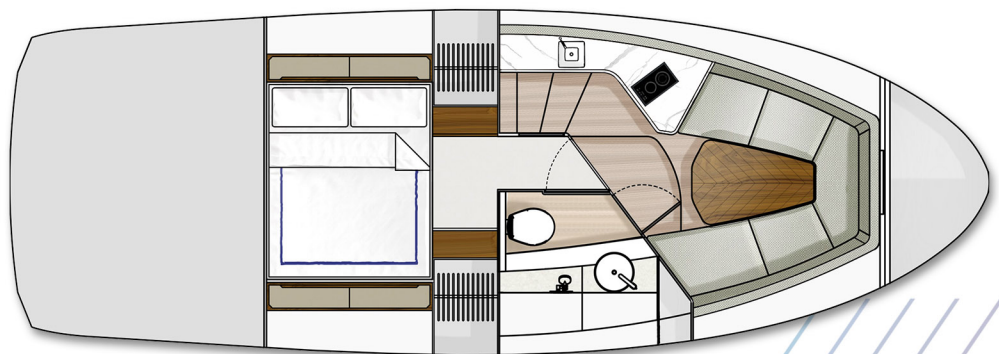

- Lower Deck with galley (optional)

Principal Dimensions

Length overall:	33'7" (10.27m)
Beam:	11'6" (3.5m)
Draft:	2'4" (0.74m) unloaded
Airdraft:	6'4" (1.95m) HardTop 11'9" (3.63m)
Berths:	2 - 4
Fuel capacity:	150 gallons / 180 US gallons (680 litres)
Displacement (light):	6.1 tonnes / 6.8 US tonnes (6,155kg)
Water capacity:	48 gallons / 58 US gallons (220 litres)
Black waste capacity:	27 gallons / 21 US gallons (80 litres)

Type approval:	CE Category C
Capacity:	8 people

Engines & Performance

2 x Mercury Verado 300	2 x Mercury Verado 350
Max. power: 600 hp	Max. power: 700 hp
Drive: Outboard	Drive: Outboard
Fuel: Petrol	Fuel: Petrol
Max. speed: 37 knots (est.)	Max. speed: 42 knots

2 x Mercury Verado 400
Max. power: 800 hp
Drive: Outboard
Fuel: Petrol
Max. speed: 48 knots

F//LINE 33 OUTBOARD

Deck

- Anchor (stainless steel)
- Anchor light
- Anchor chain (galvanised 8mm x 30m)
- Anchor chain locker
- Anchor winch & controls (electric)
- Bilge pump switches with integral operating warning lights & audible alarms
- Chain stopper (10mm)
- Ensign/courtesy flag staff
- Fenders (x6)
- Fuel filler
- High capacity emergency manual bilge pump system
- Horn
- Hot & cold transom shower
- Mooring lines
- Moulded non-slip deck surface
- Navigation lights
- Rubbing strake
- Side deck access
- Stainless steel pop-up bow, spring & stern cleats
- Stemhead roller (stainless steel)
- Toughened, single piece, curved glass windscreen
- Water filler
- Waste outlet

Helm Position

- 2x 7" Garmin® display screens
- Analogue gauges for engine tachometers, engine temperatures & fuel tank levels
- Bucket seats (fixed height)
- Compass
- Electronic single-lever throttle & gear controls for port & starboard engines
- Full engine monitoring including; digital tachometers, oil pressure gauges, temperature gauges, audible alarms, engine hour meters, helm position indicator & compass

- Garmin VHF 315i marine radio
- High speed magnetic compass
- USB socket

Electrical Systems

- All 240V, 12V circuits (USA: 2x 110V [220V] 60Hz) with circuit protection
- Electrical sockets
- Heavy duty circuit breakers
- Isolating switches to all batteries

12 Volt

- Batteries x2 for domestic services
- Battery crossover system

240 Volt

- Polarity check & earth leakage protection system
- Regulated battery inverter/charger
- Shore power supply

Cockpit

- 2x 8" waterproof speakers
- Boat hook
- Exterior upholstery & helm covers
- Fusion® Apollo audio unit
- Life raft stowage
- Manual bilge pumps
- Moulded non-slip deck surface
- Step for side deck access
- Table GRP (fixed height) *
- Table teak (fixed height) **
- Under-floor storage access hatch
- Under-seat stowage
- USB socket
- Wet bar with sink & fridge *
- Wet bar with sink **

Cabin

- 2x half height hanging lockers
- 4x trinket lockers
- Bedding
- Carpet
- Double bed (European King)
- LED ceiling lights
- Opening porthole

Saloon

- Access to head
- Carpet
- Companionway timber steps
- Crockery & cutlery (6 person)
- First aid kit
- Fixed height table
- Electrical distribution panel
- Fire extinguisher (manual)
- LED ceiling lights
- Oak Satin
- Sink with tap & infill to sideboard
- Sliding companionway door to cockpit
- Smoke alarm
- Sofa
- Solid Surface® worktop to sideboard
- Stowage lockers under seating

* Layout 1 only

** Layout 2 only

F//LINE 33 OUTBOARD

Bathroom

- Automatic shower tray pump-out system
- Electric silent-flush freshwater toilet
- Extractor fan
- Full set of bathroom fittings
- Full standing-height shower with adjustable shower head
- Mirrored cabinet doors
- Skylight
- Solid Surface® worktop
- Towel set
- Vanity unit locker & basin

Hullform & Construction

- Antifouling protection to hull
- Deep 'V' hull design by J&J Design
- Design, layout & detailing by Alberto Mancini Yacht Design and the Fairline Yachts Design Studio
- Full length moulded spray deflectors
- Hand laid components
- Hull & deck colour – White
- Integrally moulded engine bearers
- Polyurethane foam cores throughout deck for strength & thermal insulation
- Resin infused hull, deck & internal liner
- Transverse & longitudinal strengthening stringers throughout hull

Fuel System

- Emergency fuel shut-off valves
- Twin fuel tanks – 680 litre capacity
- Water separators & fuel filters

Freshwater System

- Automatic, pressurised supply
- Calorifier hot water system – 60 litre capacity
- Water tank – 160 litre capacity

Black Waste

- Holding tank – 80 litre capacity

Commissioning

- Full pre-delivery inspection & vessel commissioning at the Fairline Commissioning Centre, Ipswich, UK

* Layout 1 only

** Layout 2 only